

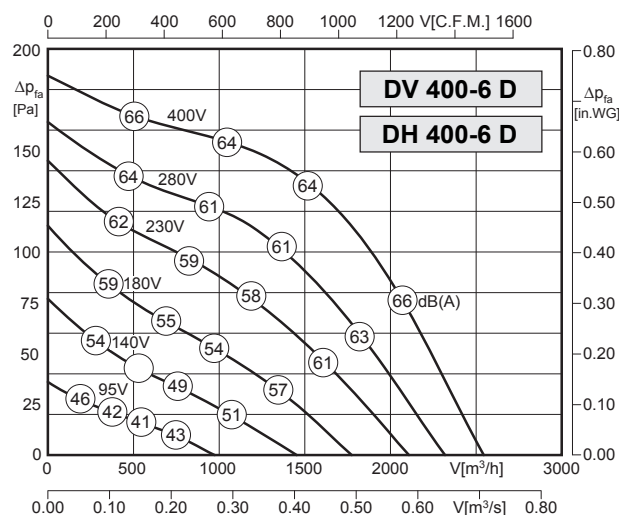


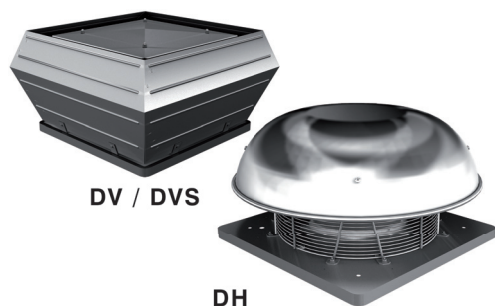

Typ / Type : DV/DH 400-6 D		Art.-No. : A00-40043 / A10-40043	
U	400V (50Hz)	Δp_{fa} min	– Pa
P ₁	0,15 kW	ΔI	6 %
I _N	0.29 A	I _A / I _N	2.8
n	880 min ⁻¹		IP54
C _{400V}	– µF		01.006
t _R	60 °C		21 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax		fM [Hz]						
		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-18	-13	-12	-9	-7	-14	-21
LWA6 [dB(A)]	Ausblasseite / outlet side	-16	-10	-6	-5	-6	-13	-22

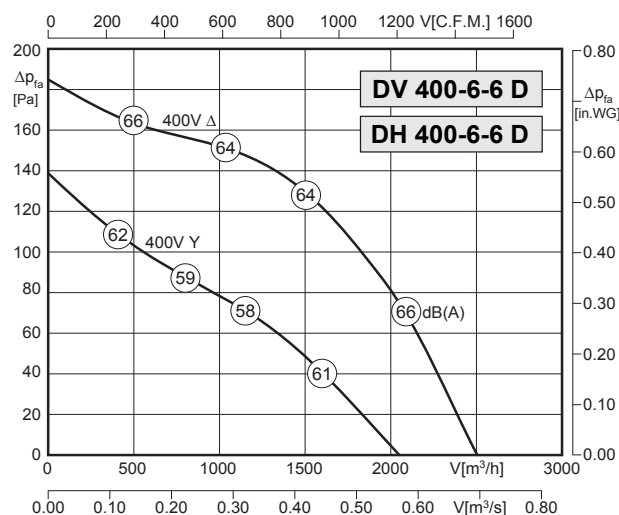

Typ / Type : DV/DH 400-6-6 D		Art.-No. : A00-40052 / A10-40052	
U	400V (50Hz)	Δp_{fa} min	– Pa
P ₁	0,15/0,1 kW	ΔI	– %
I _N	0.29/0,16 A	I _A / I _N	2.8
n	880/680 min ⁻¹		IP54
C _{400V}	– µF		01.045
t _R	60 °C		21 kg

LWArel A-bewertet bei V=0,5*Vmax LWArel A-weighted at V=0,5*Vmax		fM [Hz]						
		125	250	500	1K	2K	4K	8K
LWA5 [dB(A)]	Ansaugseite / inlet side	-18	-13	-12	-9	-7	-14	-21
LWA6 [dB(A)]	Ausblasseite / outlet side	-16	-10	-6	-5	-6	-13	-22

